


## 1. Model : ATBA110-230 (Thermal Release Tape)

## 2. Structure

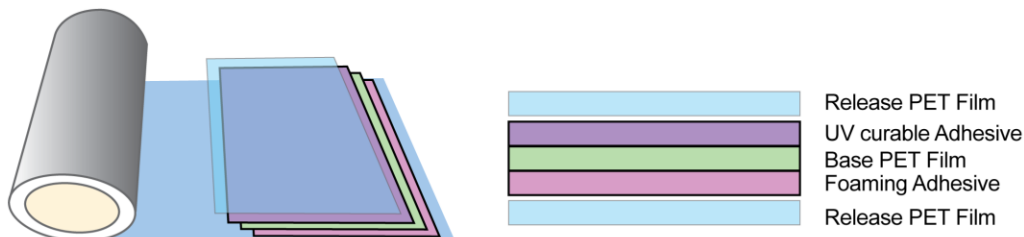

## 3. Features

- Temporary fixing for various dicing and thinning processes
- Clean detachment after heat treatment
- Heat foaming range 140~170°C

## 4. Specification

ITEM		UNIT	DATA	Remarks
Tape thickness		μm	110	Without Release Film
Base film		μm	PET Film / 50	Material / Thickness
Adhesive layer Thickness	Foaming PSA	μm	Acrylic / 20	
	UV PSA	μm	UV Acrylic / 40	
Adhesion	Before Foaming	N/25mm	4.40	
	After Foaming	N/25mm	1.05	
	Before UV	N/25mm	13.20	
	After UV	N/25mm	0.15	

## 5. Standard

ITEM	Standard	NOTE
Color	Transparency	Transparency
Width	Millimeter	230
Length	Meter	100

## 6. Remarks

- Peeling speed : 300 mm/min , Peeling angle: 180 degrees
- Standard foaming conditions : 160 °C, 70 sec.
- Standard UV condition: LED 365nm, 450mj